



Fusion Splicing Made Easy with the EFS-150

La EFS-150 es una mini fusionadora tanto para fibras monomodo como multimodo.

Con un tiempo de corte y empalme de menos de 7 segundos y un software único, es el empalmador mini más rápido y más inteligente en el mercado.

Con todas sus nuevas características, la EFS-150 establece un estándar en la industria totalmente nueva:

- Funcionamiento con un solo botón
- 80 empalmes de la batería
- Diseñado para planta exterior
- ultrarápido ciclo de compensación automática de empalme
- medio ambiente

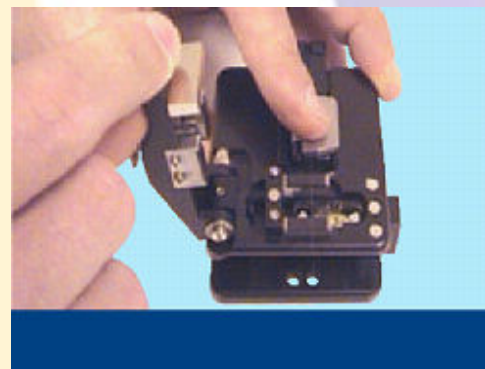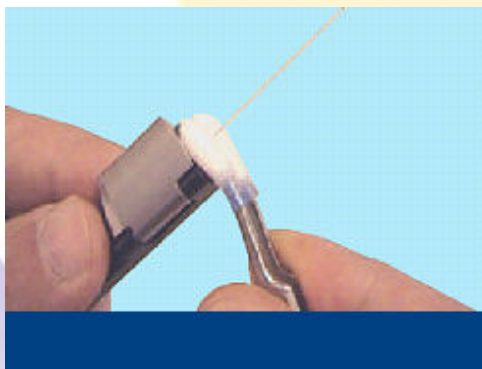



**INFORMACION
NUEVO PRODUCTO
CMATIC**

FUSIONADORA EFS - 150

INCLUYE:

- **Horno**
- **Cortadora**
- **Bateria Recargable**
- **Maletin**
- **Cargador de Bateria**
- **Cable de Alimentacion**
- **Peladora**
- **Manual de uso**





Fiber Types	SMF, DSF, MMF 50/125μm and 62.5/125μm fiber, 250μm primary and 900μm secondary coated fiber, 2100/3500μm tight buffer or loose tube cable	
Fiber Handling	Fiber holders	
Splice Programs	3 pre-defined, 5 user-editable programs	
Typical Splice Loss	0.03dB SMF, 0.05dB DSF, 0.01dB MMF	
Typical Cycle Time	7s + 60s (splice cycle + oven cycle)	
Sleeve Dimensions	Max 64mm length, 2-5mm diameter supported by oven	
External Communication	TCP/IP via RJ45 socket	
Monitor	LCD, monochrome, 71x49mm, 320x200 pixels	
Magnification	140x on internal monitor	
Storage Environment	-20-+60°C, max 98% RH, non-condensing (without battery)	
Operating Environment	0-45°C, max 95% RH, non-condensing	
Size	176x166x100mm (176x248x100mm with heat oven and battery)	
Weight	1800g (2460g with heat oven and battery)	
Power Sources	50W power supply, 90-260VAC, 50-60Hz NiMH battery unit 9.6V, 2700mAh capacity	
Splicing Capacity	80 splicing cycles with oven (>500 splices without oven)	
Additional Features	Loss estimation	Fiber fault detection
	Tensile test	Splice log
	Multiple languages	PC connection

Item	Part No.
Fusion Splicer EFS-150	136C177
Heat Oven	134C189
Battery Unit	111C027
Battery Charger	133C152
Fiber Cleaver	131C050
Power Supply	101S088
Fiber Holder, 250-400μm, right	111C227
Fiber Holder, 250-400μm, left	111C226
Fiber Holder 900μm, right	111C258
Fiber Holder 900μm, left	111C223
Tool kit	111C039
Hard case	111C100
Product CD	133P456
User's Manual	133P200