

DATASHEET: LW240721 V.1

REFERENCE	DESCRIPTION	COLOR	COMPATIBILITY
VI18U66	CM1909 - 19" 18U 600X600 Floor Standing Rack		ETSI metric and 19" IS.

VIRack Cabinets are easy-to-install, feature-rich racks designed to integrate power distribution, and maximize airflow. Their applications range from high-density computing and networking to broadcast and audio-video. They comply with ANSI/EIARS-310-D, DIN41491; PART1, IEC297-2, DIN41494; PART7, GB/T3047.2-92 standard.

CABINET FEATURES

- Size: 600*600mm HE: 18U
- Good compatibility, adapt to more servers. Perfect ventilation
- Vented front door and rear door enable ventilation and reliable operation
- The top and bottom wiring channel can be closed and adjusted.
- Optional plinth to meet under base wiring, ventilation and rat-proof.
- · Rack's side panel can be easily assembled
- · Efficient and solid cabinet connection
- Adjustable feet and heavy duty castors are available at the same time, static loading: 800kg.(with adjustable feet).
- · Advanced lock
- Surface finish: decreasing, pickling, phosphating, powder coating
- · Available in black and grey
- Height, width, and depth selectable, full range of optional accessories.

VI18U66




FEATURES






ASSEMBLING DRAFT

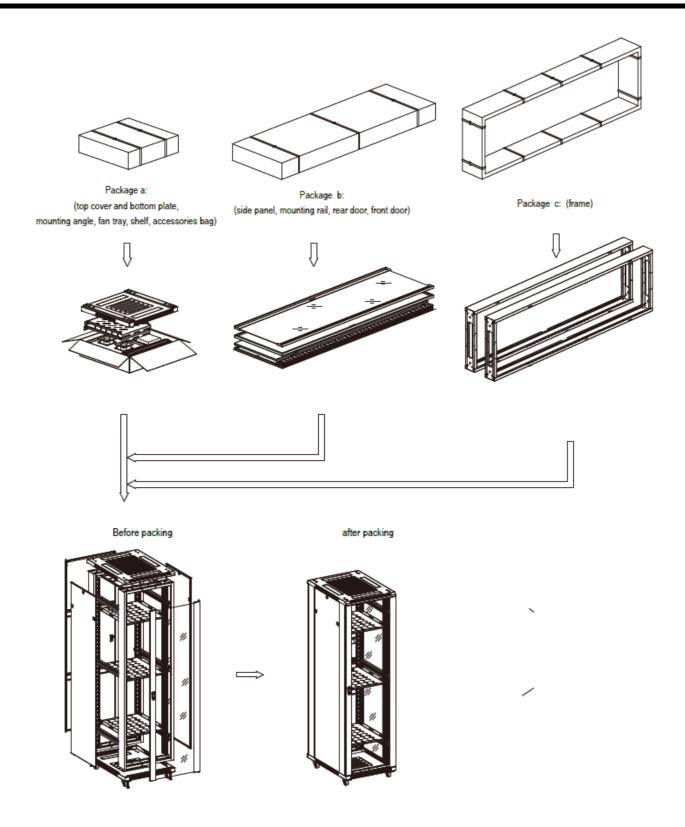




STRUCTURE

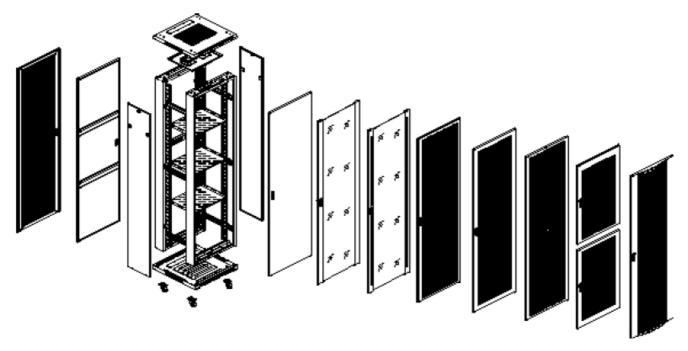


DIMENSIONS (MM)

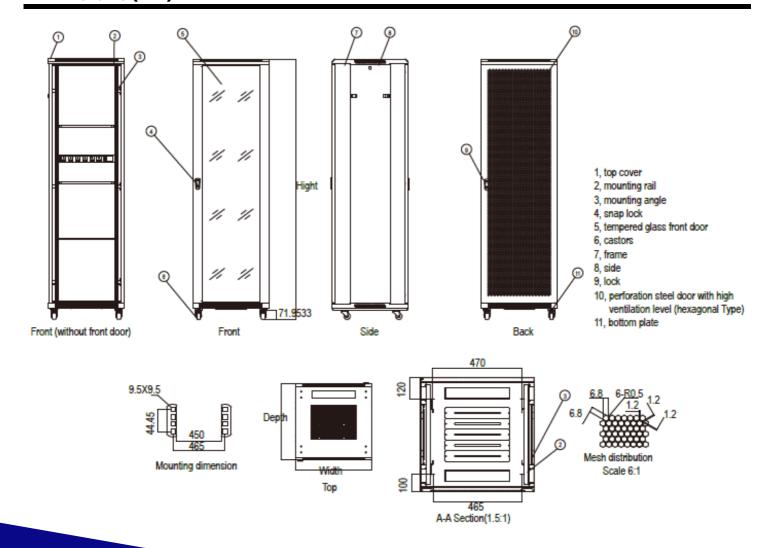




STRUCTURE

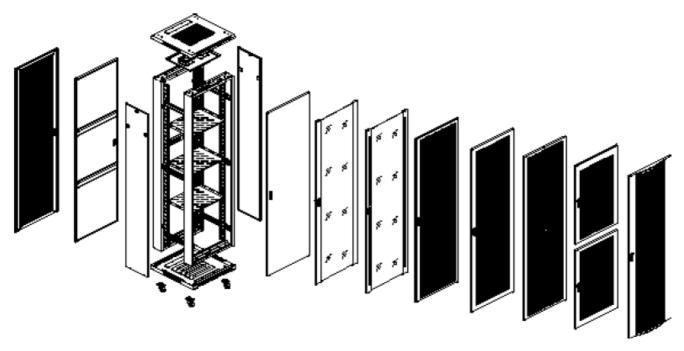


DIMENSIONS (MM)

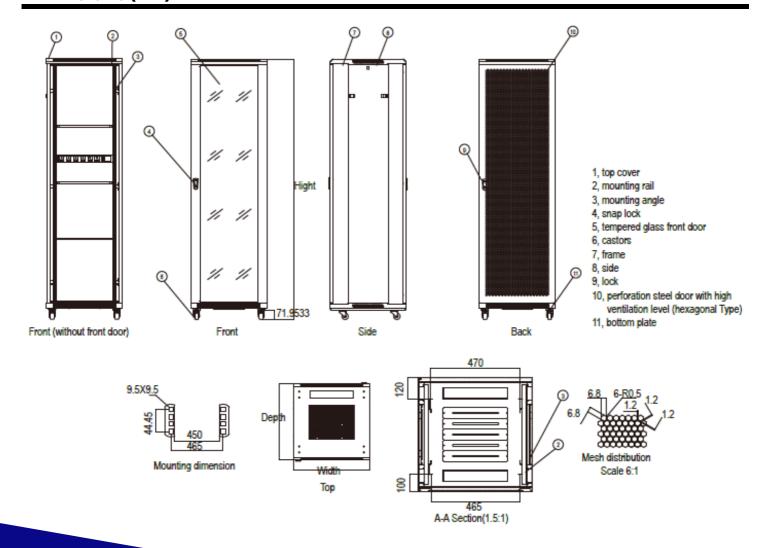




DOORS

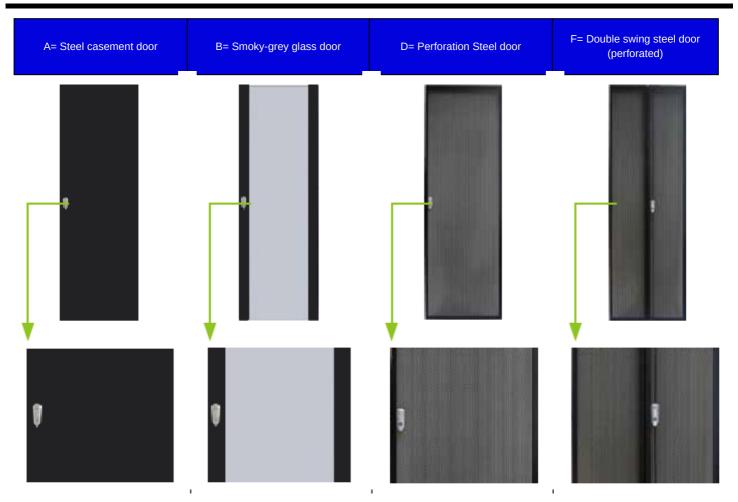



DOORS

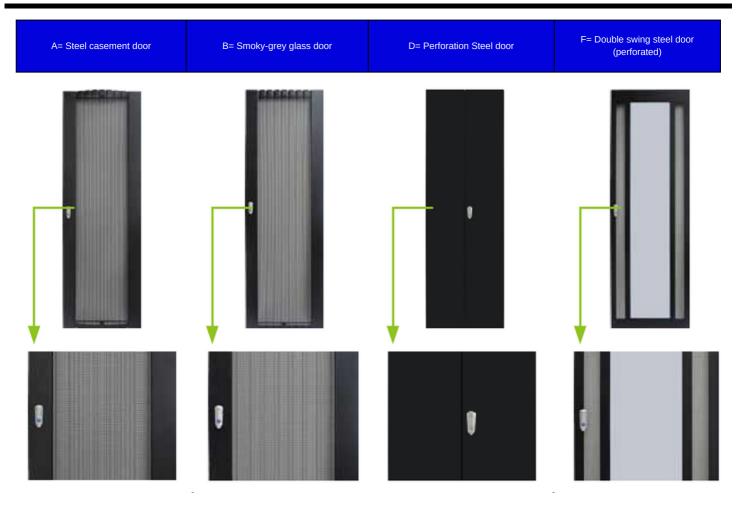

OTHER DETAILS



Crescent lock



asily assembled side panel



Symmetrical frame



Fixed shelf



Cooling fan



Bottom plate



Mounting rail with U mark



Rectangle venthole



ORDER INFORMATION

All of our products are available upon request. Those products marked with a (*) are in stock. Please contact us for further details.

	CAPACITY	WIDTH/	DEPTH/	HEIGHT/	CARTON MEASUREMENTS			VOLUME/
PART NO							HEIGHT/	CMB
					MM	MM	MM	
VI18U66*	18U	600	600	988	0.63	0,63	1,02	0.40
VI22U66	22U	600	600	1166	0.63	0,63	1,20	0.48
VI22U68	220	600	800		0.63	0,83		0.63
VI24U66*	24U	600	600	1167	117	61	26	0.25
VI27U66	27U	600	600	1388	0.63	0.63	1.42	0.56
VI37U66		600	600	1833	0.63	0,63	1,86	0.74
VI37U68	3 7U	600	800		0,63	0,83		0.97
VI37U61		600	1000		0,63	1,04		1.22
VI37U88		800	800		0,83	0,83		1.28
VI37U81		800	1000		0,83	1,04		1.61
VI42U66		600	600	2055	0.63	0.63	2.08	0.83
VI42U68		600	800		0.63	0.83		1.09
VI42U61		600	1000		0.63	1.04		1.36
VI42U611	42U	600	1100		0.63	1.14		1.49
VI42U612	420	600	1200		0.63	1.24		1.62
VI42U86*		800	600		0.83	0.63		1.09
VI42U88*		800	800		0.83	0.83		1.43
VI42U81		800	1000		0.83	1.04		1.80
VI47U66		600	600	2277	0.63	0.63	2.30	0.91
VI47U68		600	800		0.63	0.83		1.20
VI47U61	47U	600	1000		0.63	1.04		1.51
VI47U88		800	800		0.83	0.83		1.58
VI47U81		800	1000		0.83	1.04		1.99

^{*}IN STOCK



ORDER INFORMATION

S/N	SPECIFICATIONS	ОТY	UNIT	MATERIAL	SURFACE FINISH	REMARK	
1	Top Cover	1	PCS	1.2mm cold rolled steel	Powder coated		
2	Frame (9-fold section steel)	2	PCS	1.2mm cold rolled steel	Powder coated		
3	Front door	1	PCS	1.2mm cold rolled steel	Powder coated	Type door	
4	Side panel	4	PCS	1.2mm cold rolled steel	Powder coated	With lock	
5	Left rear door	1	PCS	1.2mm cold rolled steel	Powder coated	A type door	
6	Lock	1	PCS				
7	Mounting rail	6	PCS	2.0mm cold rolled steel	Powder coated	1.5mm for 66	
8	Mounting angle	4	PCS	1.2mm cold rolled steel	Powder coated		
9	Bottom plate	6	PCS	1.2mm cold rolled steel	Powder coated		
10	Spacer	2	PCS			Width 800mm	
11	Fixed shelf	1	PCS	1.2mm cold rolled steel	Powder coated	2pcs under 32u, 1pcs under 22u	
12	Heavy duty castors	4	PCS				
13	Feet	4	PCS				
14	Cage and Nuts	40	PCS			20pcs under 32u	
15	Fan	4	PCS			2 fans for 600mm depth	
16	6-way power strip	1	PCS				
17	Wrench	1	PCS				